EV GOLF / UTILITY VEHICLES



Made in USA

HARNESSING THE POWER OF INGENUITY

For over 90 years, Trojan Battery has been an innovator in deep-cycle battery technology. We know that building the highest performance-rated batteries doesn't just come by chance. It requires knowing the needs of our customers. It requires knowing our competitors and the products they build. It requires ingenuity, sheer determination and an unwavering commitment to quality.

EVERY DAY, GOLF CAR AND ELECTRIC VEHICLE MANUFACTURERS ARE INTEGRATING TECHNOLOGICAL ADVANCEMENTS REQUIRING MORE POWERFUL BATTERY TECHNOLOGY. TROJAN'S BATTERY DESIGNS PLAY AN ESSENTIAL ROLE IN ENHANCING YOUR EXPERIENCE ON AND OFF THE COURSE BY DELIVERING A WHOLE NEW CLASS OF DEEP-CYCLE TECHNOLOGY.

A LEGACY OF MANUFACTURING INNOVATION AND EXCELLENCE HAS ALWAYS BEEN THE CORNERSTONE OF TROJAN BATTERY'S SUCCESS IN THE DEEP-CYCLE BATTERY INDUSTRY. TROJAN UTILIZES THE FINEST MATERIALS PAIRED WITH TECHNICAL DEVELOPMENTS AND PRODUCTION ENHANCEMENTS INCLUDING CAST ON STRAP TECHNOLOGY, ADVANCED ROBOTICS AND OTHER AUTOMATED TECHNOLOGY. TROJAN IS DEDICATED TO PRODUCING BATTERIES THAT DELIVER SUPERIOR PERFORMANCE, DURABILITY AND RELIABILITY DAY IN AND DAY OUT.




A NEW Class of Deep-Cycle Flooded Battery Technology

Trojan's Ranger[™] 160 battery delivers an entirely new class of deep-cycle battery technology that addresses a core golf market need – longer range. There simply is no comparable battery on the market today.

Ranger[™] 160

Trojan's Ranger 160 deep-cycle battery is optimized for excursions that require significantly more range than a typical golf car battery can manage. Ranger 160 delivers 35% more travel time between recharging than traditional 8-volt golf car batteries offer, enabling consumers to embark on longer excursions using electric power than what was previously possible. As an 8-volt, high-performance battery, Ranger 160 is rated at 160 minutes when discharged at 56 amps, and is the first U.S.-made, long range battery that meets the increasing demands of golf carts, utility and low-speed passenger vehicles, as well as hunting buggies. The internal design of Ranger 160 includes more active material delivering higher performance for long range driving requirements, as well as Trojan's exclusive T2 Technology.

| INTERNAL DESIGN | |
|--------------------------------------|--|
| FEATURES | BENEFITS |
| More Active Material / Taller Plates | Provides higher capacity for long range driving requirements |
| Trojan's Maxguard® T2 Separator | Extends battery life and lowers maintenance costs |
| | |
| EXTERNAL DESIGN | |
| FEATURES | BENEFITS |
| Stronger Case Walls | Increases durability for extended battery life |
| Taller Case | Optimized design delivers higher performance resulting in longer intervals between charges |

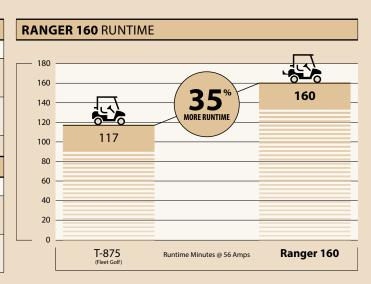

Clean energy for life_"

Manufacturing Excellence Ensures Product Quality

Trojan's state-of-the-art manufacturing is just one of the ways we build industry-leading quality into our products. At Trojan we are investing at record levels in manufacturing and production improvement projects at our U.S. facilities. Our recent addition of advanced robotics, state-of-the art cast-on-strap (COS) technology, automated acid fill stations, and heat seal and testing equipment ensures the overall quality of our products.

With ISO 9001:2008 certified manufacturing plants in California and Georgia, Trojan is dedicated to producing batteries that deliver superior performance, durability and reliability day in and day out.



Cast-On-Strap

Trojan's automated cast-on-strap equipment uses cutting-edge technology to enhance product quality. Aligning the battery plates with lugs ensures a series circuit between the lead plates for optimum performance.



Advanced Robotics Advanced robotics are used throughout Trojan's manufacturing plant to ensure a higher level of product consistency and quality. Robotics streamline our battery production and improve our manufacturing lead time.

HydroLink[™] Watering System (For Flooded Batteries Only)



Battery Watering Made Easy

Proper maintenance and periodic watering are important factors in maximizing the performance and life of Trojan deep-cycle, flooded batteries. Battery maintenance can be a costly, time-consuming and messy job. With Trojan's HydroLink[™] advanced, single-point watering system, precise battery watering is made easy saving valuable time and money.

Convenient Installation


Trojan's HydroLink watering system is specifically designed to work with Trojan's 6-volt, 8-volt and 12-volt flooded batteries* and takes the guess work out of properly watering flooded batteries. In addition, the design of the HydroLink watering system prevents direct access to a battery's electrolyte and reduces acid splash, enhancing safety during the battery watering process. With a simple installation of the HydroLink manifolds and tubing, the system is ready for use. Once installed, a complete set of batteries can be filled in less than 30 seconds.

* HydroLink is not compatible with all batteries. See warranty for details: www.trojanbattery.com/products/hydrolink-watering-system/

T2 Technology Trojan's Next Generation of Deep-Cycle Battery Advancement

Innovative Deep-Cycle Battery Technology

Engineered specifically to meet the increasing demands of today's golf cars, Trojan's T2 Technology[™] builds upon our historically-proven technology and incorporates improvements resulting in a superior battery with maximum sustained performance, longer life and increased total energy.

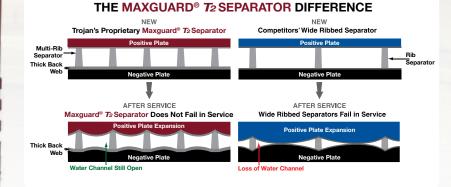

I Alpha Plus[®] Paste with T2 Technology[™]

2

З

Maximum Operating Performance

Trojan's Alpha Plus Paste is a proprietary, high density paste formulation engineered to deliver outstanding battery performance. It optimizes porosity development in the active material utilizing the active material more effectively resulting in sustained battery performance over a longer period of time. Trojan's T2 Technology introduces a patent-pending T2 metal agent into Alpha Plus Paste strengthening its electrochemical processing capabilities. Alpha Plus Paste with T2 Technology increase both sustained capacity and total overall amperehours resulting in more operating power. It's a key reason why Trojan batteries consistently outperform the competition.

Trojan Grid Technology Reduced Downtime

Trojan's grid technology is a lead antimony alloy grid mixture formulated specifically for use with Trojan's Alpha Plus Paste with T2 Technology. The grid formulation provides exceptional structural adhesion between the Alpha Plus Paste and the grid frame. Thick grids reinforce the strength of the frame and reduce overall corrosion. The grid configuration is optimized to enhance current flow through the grid network providing exceptional battery performance, reducing downtime and lowering overall maintenance costs.


Maxguard[®] T2 Separator Longer Battery Life

Exclusively available in Trojan batteries is our Maxguard T2 advanced separator. Its multi-rib geometry design keeps acid channels open longer enhancing electrochemical processing while reducing the risk of stratification. Maxguard's proprietary rubber-based material formulation inhibits antimony transfer between the positive grids and negative plates; a protection not available in many other competitor batteries. A newly fortified, thick back web provides even greater separator strength resulting in a more robust battery with increased protection against failures caused by separator degradation. Trojan's Maxguard T2 advanced separator sustains performance, provides longer battery life and significantly lowers operating costs.



Trojan has developed **Reliant[™] AGM with C-Max Technology[™]** for a wide range of applications that require deep-cycling power such as golf, utility, NEV and low-speed vehicles, as well as hunting buggies.



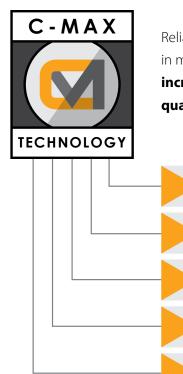

Reliant's unique **C-Max Technology** incorporates a wide range of features not found in many of today's AGM battery offerings. **These combined elements deliver increased total energy output, maximized sustained performance, consistent quality, and enhanced durability.**

PROPRIETARY PASTE MAXIMIZES SUSTAINED PERFORMANCE AND **INCREASES TOTAL ENERGY**

THE UNIQUE SEPARATOR PROTECTS AGAINST STRATIFICATION AND **EXTENDS BATTERY LIFE**

THE PLASTIC POLYMER CASE INCREASES DURABILITY AND PROVIDES HIGHER BATTERY CELL COMPRESSION TO **ENSURE RELIABLE PERFORMANCE**

FLAME ARRESTORS PROVIDE **MAXIMUM BATTERY SAFETY**

MANUFACTURING EXCELLENCE DELIVERS **CONSISTENT BATTERY QUALITY** FOR DEPENDABLE BATTERY FUNCTIONALITY IN DEEP-CYCLE AGM APPLICATIONS



Product Specification Guide

| BCI GROUP SIZE | ТҮРЕ | CAPACITY ^{&} Minutes | | | CAPACITY ^B Amp-Hours (AH) | | | | ENERGY (kWh) | TERMINAL | DIMEN | SIONS ^c Inches | WEIGHT Ibs. | HydroLink™ or | |
|---|-------------|-----------------------------------|-------------|-------------|--------------------------------------|---------------|---------------|----------------|----------------|-------------------|-------------|---------------------------|---------------------|-------------------|---|
| | | @25 Amps | @56 Amps | @75 Amps | 5-Hr Rate | 10-Hr Rate | 20-Hr Rate | 100-Hr Rate | 100-Hr Rate | Type ^E | Length | Width | Height ^D | (kg) ⁶ | Single-Point Watering Kit ^F |
| 6 VOLT DEEP-CYCLE FLOODED BATTERIES WITH T2 TECHNOLOGY™ | | | | | | | | | | | | | | | |
| GC2 | T-605 | 383 | _ | 105 | 175 | 193 | 210 | 232 | 1.39 | 1, 2, 3 | 10.30 (262) | 7.13 (181) | 11.15 (283) | 58 (26) | HydroLink |
| GC2 | T-105 | 447 | — | 115 | 185 | 207 | 225 | 250 | 1.50 | 1, 2, 3, 4 | 10.30 (262) | 7.13 (181) | 11.15 (283) | 62 (28) | HydroLink |
| GC2 | T-105 Plus | 447 | _ | 115 | 185 | 207 | 225 | 250 | 1.50 | 1, 2, 3 | 10.30 (262) | 7.11 (181) | 11.07 (281) | 62 (28) | N/A |
| GC2 | T-125 | 488 | — | 132 | 195 | 221 | 240 | 266 | 1.60 | 1, 2, 3, 4 | 10.30 (262) | 7.13 (181) | 11.15 (283) | 66 (30) | HydroLink |
| GC2 | T-125 Plus | 488 | _ | 132 | 195 | 221 | 240 | 266 | 1.60 | 1, 2, 3 | 10.30 (262) | 7.11 (181) | 11.07 (281) | 66 (30) | N/A |
| GC2H | T-145 | 530 | — | 145 | 215 | 239 | 260 | 287 | 1.72 | 1, 2, 4 | 10.30 (262) | 7.13 (181) | 11.91 (303) | 72 (33) | HydroLink |
| GC2H | T-145 Plus | 530 | _ | 145 | 215 | 239 | 260 | 287 | 1.72 | 1, 2 | 10.30 (262) | 7.13 (181) | 11.91 (303) | 72 (33) | N/A |
| | | | | 8 V O | LT DEEI | P-CYCL | E FLOO | DED B | ATTERIES V | VITH T2 | TECHNOL | OGY™ | | | |
| GC8 | T-875 | 295 | 117 | _ | 145 | 155 | 170 | 189 | 1.51 | 1, 2 | 10.24 (260) | 7.10 (180) | 11.13 (283) | 63 (29) | HydroLink |
| GC8 | T-890 | 340 | 132 | _ | 155 | 175 | 190 | 211 | 1.69 | 1, 2 | 10.24 (260) | 7.10 (180) | 11.13 (283) | 69 (31) | HydroLink |
| GC8H | Ranger 160 | 430 | 160 | _ | 169 | 186 | 204 | 225 | 1.80 | 2 | 10.21 (259) | 7.10 (180) | 11.90 (302) | 76 (34) | HydroLink |
| | | | | 12 V C | DLT DEE | P-CYCI | .E FLOC | DDED B | ATTERIES | WITH T2 | TECHNO | LOGY™ | | | |
| GC12 | T-1260 Plus | 260 | 90 | 60 | 113 | 126 | 140 | 155 | 1.86 | 1 | 12.96 (329) | 7.13 (181) | 10.71 (272) | 78 (35) | N/A |
| GC12 | T-1275 | 280 | 102 | 70 | 120 | 134 | 150 | 166 | 1.99 | 1, 2 | 12.96 (329) | 7.13 (181) | 11.13 (283) | 85 (39) | HydroLink |
| GC12 | T-1275 Plus | 280 | 102 | 70 | 120 | 134 | 150 | 166 | 1.99 | 1 | 12.96 (329) | 7.13 (181) | 10.71 (272) | 85 (39) | N/A |
| | | | | | | 6 \ | OLT DI | EEP-CY | CLE GEL B/ | ATTERY | | | | | |
| GC2 | 6V-GEL | 394 | _ | _ | 154 | 167 | 189 | 198 | 1.19 | 6 | 10.25 (260) | 7.08 (180) | 10.82 (275) | 68 (31) | N/A |
| | | | 6 | VOLT R | ELIAN | T™ DEE | P-CYCL | E AGM | BATTERY W | /ITH C-N | ЛАХ ТЕСН | NOLOGY | тм | | |
| GC2 | T105-AGM | 440 | - | 115 | 171 | 187 | 217 | 230 | 1.38 | 5, 8, 15 | 10.30 (262) | 7.06 (179) | 10.73 (273) | 68 (31) | N/A |
| | | | 8 | VOLT R | ELIANT | ™ DEEF | -CYCLI | AGM | BATTERY W | /ITH C-N | ЛАХ ТЕСН | NOLOGY | тм | | |
| GC8 | T875-AGM | 320 | 118 | _ | 130 | 142 | 160 | 170 | 1.36 | 5, 8, 15 | 10.30 (262) | 7.06 (179) | 10.73 (273) | 70 (32) | N/A |

A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
B. The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.57 V/cell. Capacities are based on peak performance.
C. Dimensions may vary depending on type of handle or terminal. Batteries to be mounted with .5 inches (12.7 mm) spacing minimum.

D. Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
 E. Terminal images are representative only.
 N/A = Not Available. For more information on HydroLink[™] or the Single-Point Watering Kit (SPWK), please contact your Trojan Battery representative. Gel and AGM batteries do not require watering.
 G. Weight may vary.

Trojan's battery testing procedures adhere to both BCI and IEC test standards.

Terminal Configurations

| | | | | | | | | 0 | | A. | | B | | \bigcirc | |
|-------------------------|------|--------------------------|------|-----------------------------|------|--------------------|-----|------------|----|---------------------------|----|-----------------|----|----------------|-------|
| 1 | ELPT | 2 | EHPT | 3 | EAPT | 4 | EUT | 5 | LT | 6 | DT | 8 | AP | 15 | M6/M8 |
| Embedded Low Profile | | Embedded High Profile | | Embedded Automotive Post | | Embedded Universal | | L-Terminal | | Automotive Post & Stud | | Automotive Post | | 6mm/8mm Insert | |

7



Experience The Trojan Difference – Reputation Built on Quality, Leadership and Innovation

Leadership

Founded in 1925 by co-founders George Godber and Carl Speer, Trojan Battery Company is the world's leading manufacturer of deepcycle batteries. From deep-cycle flooded batteries to deep-cycle gel and AGM batteries, Trojan has shaped the world of deep-cycle battery technology with over 90 years of battery manufacturing experience. With the invention of the golf car battery for the Autoette vehicle in 1952, Trojan pioneered the development of deep-cycle battery technology for the golf industry; successfully introducing mobilization to the game of golf. For Trojan, this began a legacy of leadership and innovation that prevails today in the global, deep-cycle markets spanning applications for golf, floor machines, transportation, renewable energy, aerial work platforms, marine and recreational vehicles. Trojan batteries are available worldwide through our global network of master distributors.

Headquartered in Santa Fe Springs, Calif., Trojan's operations include ISO 9001:2008 certified manufacturing plants in California and Georgia, three advanced research and development centers dedicated exclusively to deep-cycle battery technologies and international offices located in Europe, U.A.E. and Asia. Trojan is a proud member of the Battery Council International (BCI) and a technical research partner with the Bulgarian Academy of Sciences.

Leading-Edge Technical Support

At Trojan one of our core strengths is the dedication and support we provide to our customers. Our expertise as the world's leading manufacturer of deep-cycle batteries provides us with a unique knowledge and understanding of battery technology in a variety of applications. We apply this knowledge and experience to the benefit of our customers by offering outstanding technical support provided by experienced engineers. To assist our customers with in-depth understanding of battery technologies and systems specifications, Trojan offers comprehensive over-the-phone and email technical support.

Environmental Stewardship

At Trojan Battery, when we say, "Clean energy for life"," we mean every word. As proactive supporters of environmental sustainability, our environmental stewardship focuses on clean energy initiatives and recycling programs.

- Trojan batteries are 99% recyclable. The container plastic, battery lead and electrolyte from old deep-cycle batteries can be recycled to produce new deep-cycle batteries.
- Through its partnership with Southern California Edison (SCE) Trojan saves over 8 million kilowatt hours and cuts CO2
 emissions by over 12 million pounds significantly reducing our annual energy consumption and carbon foot print.



TROJAN BATTERY COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV = ISO 9001:2015 =





For more information, call 800.423.6569 or + 1.562.236.3000 or visit www.trojanbattery.com Your Local Trojan Battery Representative:

